



Applications



Solar Water Heating



Solar Pool Heating

Thank you for purchasing the SunEarth RexRack Kit. The use of all stainless steel hardware and 6063-T6 structural aluminum makes the SunEarth RexRack a simple, strong and durable solution for your racking needs.

Package Contains:


Front Foot Assembly Part # MTG-FF-BA										
ID	Qty.	Description								
1	1 ea.	Front Hinge Bracket								
2	1 ea.	Fastener Assembly								
3	1 ea.	Mounting Foot								
Telescoping Leg Assembly Part # MTG-RTL-XXXX										
2	2ea.	. Fastener Assembly								
3	1 ea.	Mounting Foot								
4	1 ea.	Rear Hinge Bracket								
5	1 ea.	Rear Leg Slider								
6	1 ea.	Rear Leg								
Additional Components										
7	* ea.	#12 18-8 Self-Drilling Screw								
8	* ea.	SolarStrut Splices								
9	* ea.	C-SSN Collector Clamps								
10	* ea.	SolarStrut Lengths								
11	1 ea.	Diagonal Brace								
12	2 ea.	SSN-38 SolarStrut Nut Assembly								

^{* =} Quantities Dependent on kit









*Dashed Boxed Components are preassembled within kit packaging


Due to SunEarth's policy of continuous product improvement, specifications are subject to change without notice.








Part Number Legend:

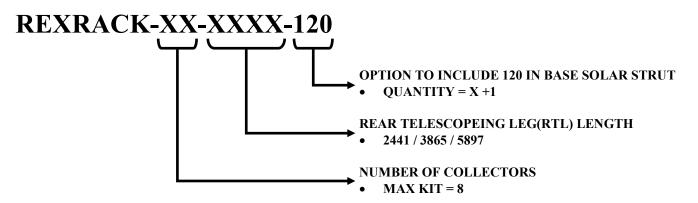

Quantities of Components per kit:

	Kit Component Quantities (Quantity of SS* in table below are doubled)										
KIT PART NUMBER	RTL	FF	SPLICE	SSS1	SSS2	SSS3	SSS4	SSS5	C-SSN	#12 SCREW	
REXRACK-1-XXXX	2	2	0	52"					4	16	
REXRACK-2-XXXX	3	3	0	104"					8	32	
REXRACK-3-XXXX	4	4	1	78"	78"				12	48	
REXRACK-4-XXXX	5	5	2	78"	104"	26"			16	64	
REXRACK-5-XXXX	6	6	3	26"	104"	104"	26"		20	80	
REXRACK-6-XXXX	7	7	3	78"	104"	104"	26"		24	96	
REXRACK-7-XXXX	8	8	3	78"	104"	104"	78"		28	112	
REXRACK-8-XXXX	9	9	4	78"	104"	104"	104"	26"	32	128	

SolarStrut Sections (SSS*), must be laid out in sequential order outlined above SSS1 spliced to SSS2 to the last SolarStrut Section. This will place splices midspan to collectors.

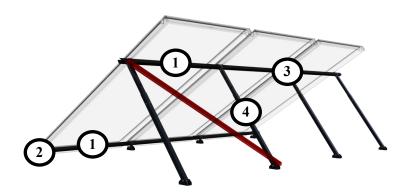

Installation Notes:

- 1. Spliced to be installed midspan of collector.
- **Each Front Hinge Requires a** screw in every predrilled hole, 3 total.
- 3. Each Rear Hinge Requires a screw in every predrilled hole, 2 total.
- 4. Reach Rear Telescoping Leg Requires a screw in every predrilled hole, 3 total.

Due to SunEarth's policy of continuous product improvement, specifications are subject to change without notice.

